


Material: Stahl verzinkt (DIN 2353)

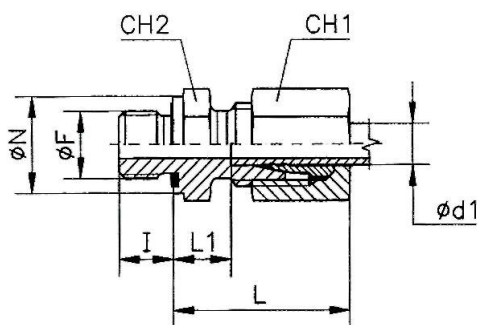

V 28-ZW

Gerade Einschraubverschraubung, Außengewinde zylindrisch, weichdichtend, leichte Ausführung

Artikel Nr.	Typen Nr.	Rohr Außen-Ø	PN	I	L	L1	CH1	Gewinde Ø F	Ø N	CH2
112249	V 25-ZW	6	315	8,0	23,0	8,5	14	G 1/8	14,0	14
112251	V 28-ZW	6	315	12,0	25,0	10,0	14	G 1/4	19,0	19
112255	V 33-ZW	6	315	12,0	26,0	11,5	14	G 3/8	22,0	22
112250	V 26-ZW	8	315	8,0	24,0	8,5	17	G 1/8	14,0	14
112252	V 29-ZW	8	315	12,0	25,0	10,0	17	G 1/4	19,0	19
112256	V 34-ZW	8	315	12,0	26,0	11,5	17	G 3/8	22,0	22
112260	V 38-ZW	8	315	14,0	27,0	12,0	17	G 1/2	27,0	27
112253	V 30-ZW	10	315	12,0	26,0	11,0	19	G 1/4	19,0	19
112257	V 35-ZW	10	315	12,0	27,0	12,5	19	G 3/8	22,0	22
112261	V 39-ZW	10	315	14,0	28,0	13,0	19	G 1/2	27,0	27
112254	V 31-ZW	12	315	12,0	26,0	12,0	22	G 1/4	19,0	19
112258	V 36-ZW	12	315	12,0	27,0	12,5	22	G 3/8	22,0	22
112262	V 40-ZW	12	315	14,0	28,0	13,0	22	G 1/2	27,0	27
112259	V 37-ZW	15	315	12,0	29,0	13,5	27	G 3/8	22,0	24
112263	V 41-ZW	15	315	14,0	29,0	14,0	27	G 1/2	27,0	27
112264	V 42-ZW	18	315	14,0	31,0	14,5	32	G 1/2	27,0	27
112265	V 43-ZW	18	315	16,0	30,0	14,5	32	G 3/4	32,0	32
112266	V 44-ZW	22	160	16,0	33,0	16,5	36	G 3/4	32,0	32

Baumaße sind ca.-Maße bei angezogener Überwurfmutter.