
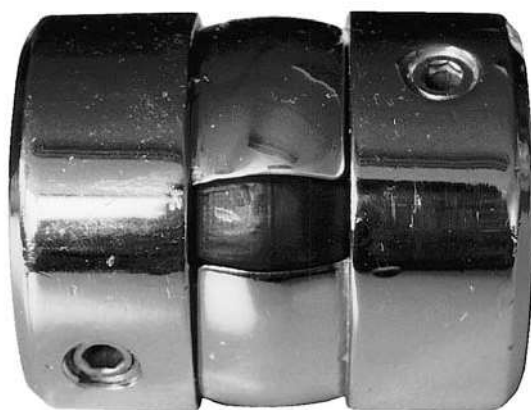



min : 6 mm

max : 42 mm

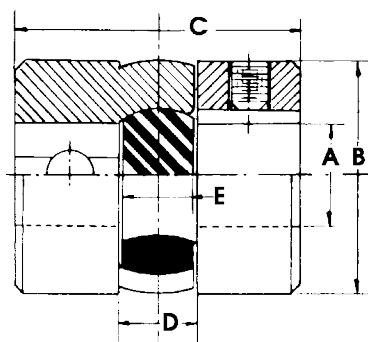

Type	 max. (mm)	 min. (mm)	 Nm 1m	 tr/min omw/min rpm - min ⁻¹ min.max.	 (°) max.	 (mm) max.	 (mm) max.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	 kg
1 S	16	6,0	1,28	6000	3	1	1,5	16	27,5	38	11	9,5	0,110
2 S	24	9,8	4,35	5500	3	1	2,0	24	42,0	52	14	12,7	0,350
3 S	35	13,8	17,90	4500	2	2	2,5	35	58,5	71	22	19,0	0,820
4 S	42	18,8	33,50	4000	2	2	3,0	42	75,0	89	26	22,5	2,050