


Gummi-Metall-Isolierhülse Ausführung IH - Two-Piece Mounts



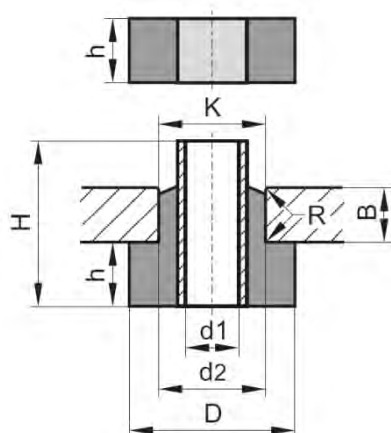


Montage- / Einbaubeispiele

hängende Montage

stehende Montage

Wand- Montage



Nenngröße		Abmessungen			Anschlussmaße				Scheibe (optional)		
D	H	h	d1	d2	G	K	B	R	D1	d3	s
mm	mm	mm	mm	mm	bis	mm	mm	mm	mm	mm	mm
32	32	13	10	20	M10	20	10..12	1	38	10,5	2
48	50	20	13,0 ^{+0,5}	33	M12	32	13..16	2	55	13,5	3
64	62	23	16	39	M16	38	19...23	2	70	16,5	4
89	73	25	24	58	M24	57	25...30	3	95	25	4
124	86	32	27	65	M27	65	25...35	3	130	28	5

Nenngröße		max. Belastung F _{max} (axial/radial) ¹⁾					Federsteifigkeit c (axial/radial) ²⁾					bei
D	H	30° Sh.	40° Sh.	50° Sh.	60° Sh.	70° Sh.	30° Sh.	40° Sh.	50° Sh.	60° Sh.	70° Sh.	B ³⁾
mm	mm	N	N	N	N	N	N/mm	N/mm	N/mm	N/mm	N/mm	mm
32	32	250	450	600	1.000	1.200	300	525	700	1.040	1.650	12
		100	150	250	400	630	625	1.250	1.315	1.820	2.860	
48	50	500	650	900	1.250	2.000	325	460	655	1.080	1.600	16
		200	400	550	750	1.050	475	615	915	1.390	2.020	
64	62	850	1.050	1.600	2.400	4.100	520	930	1.470	1.890	2.770	23
		400	500	650	1.000	1.750	350	750	1.030	1.750	2.360	
89	73	1.500	2.300	3.100	4.500	6.100	1.230	1.700	2.580	3.630	4.450	30
		450	900	1.300	1.700	2.800	980	1.300	2.000	2.980	4.120	
124	86	3.600	7.200	10.000	14.500	19.000	1.670	2.600	4.000	6.500	12.300	35
		750	1.200	1.600	2.250	3.330	800	1.290	2.080	3.400	7.500	

¹⁾ zulässige statische Dauerlast, der eine dynamische Wechsellast überlagert werden kann ²⁾ ca. Federrate

³⁾ die Federeigenschaften gelten für die empfohlene Klemmhöhe B