



Werkstoff

- Thermoplast, schwarz

- Stahl, brüniert

- Duroplast PF 31, rot ähnlich RAL 3003

- Stahl, brüniert

Technical drawing of a 3D-printed part, showing multiple views and dimensions.

Main View (Top): A circular cross-section with a central hole of diameter $\varnothing 46$. The outer diameter is $\varnothing 60$. The part is divided into four quadrants by a vertical centerline and a horizontal centerline. The top and bottom quadrants are labeled "Spannweg" (spanning path). The left and right quadrants are labeled "Zustellweg" (feeding path). The top and bottom quadrants are also labeled "Endpunkt Rechtsausführung" (end point right execution). The left and right quadrants are also labeled "Endpunkt Linksausführung" (end point left execution). The central hole is labeled "M6". The top and bottom quadrants are also labeled "Ausgangspunkt Rechtsausführung" (starting point right execution). The left and right quadrants are also labeled "Ausgangspunkt Linksausführung" (starting point left execution). The top and bottom quadrants are also labeled "Zustellweg" (feeding path). The left and right quadrants are also labeled "Spannweg" (spanning path).

Side View (Right): A side view showing the part's profile. The total height is 120. The top section has a diameter of $\varnothing 28$. The bottom section has a diameter of $\varnothing 14$. The bottom section has a width of 31. The text "Bohrung wegen Querachse nicht durchgehend" (drilling because transverse axis not through) is present.

Front View (Bottom Left): A front view showing the part's profile. The total width is 10. The top section has a width of 2. The bottom section has a width of 2. The bottom section has a height of 10. The text "Zug" (tension) and "Druck" (pressure) are present.

Top View (Bottom Right): A top view showing the part's profile. The total width is 10. The top section has a width of 2. The bottom section has a width of 2. The bottom section has a height of 10. The text "Zug" (tension) and "Druck" (pressure) are present.

Bottom View (Bottom): A bottom view showing the part's profile. The total width is 10. The top section has a width of 2. The bottom section has a width of 2. The bottom section has a height of 10. The text "Zug" (tension) and "Druck" (pressure) are present.

Additional Views (Bottom): Three additional views are shown: "Kegel" (cone), "Prisma" (prism), and "Scheibe" (disc). Each view shows the part's profile with dimensions: "Kegel" (cone) has a height of 24, a top diameter of $\varnothing 14$, and a bottom diameter of $\varnothing 10$. "Prisma" (prism) has a height of 24, a top diameter of $\varnothing 14$, and a bottom diameter of $\varnothing 10$. "Scheibe" (disc) has a height of 24, a top diameter of $\varnothing 14$, and a bottom diameter of $\varnothing 10$.


Bestellinformationen


Zustellweg [mm]	s Spannweg [mm]	Spannkraft max. [kN]	 [g]	Art.-Nr.
links Druck, mit durchgehender Bohrung				
10	2	4,9	749	23260.0014

Zubehör

	 [g]	Art.-Nr.
Scheibe		
	270	23260.0042
Kegel		
	85	23260.0044
Prisma		
	82	23260.0046

Anwendungsbeispiel

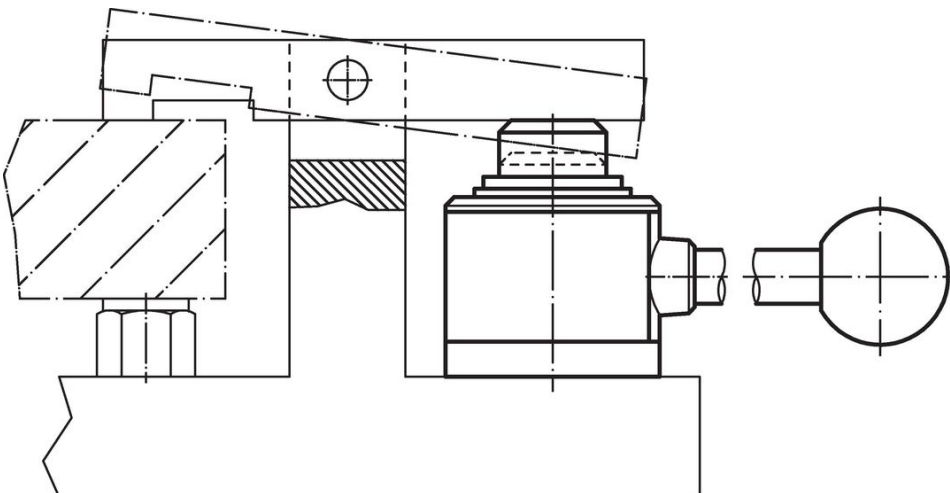

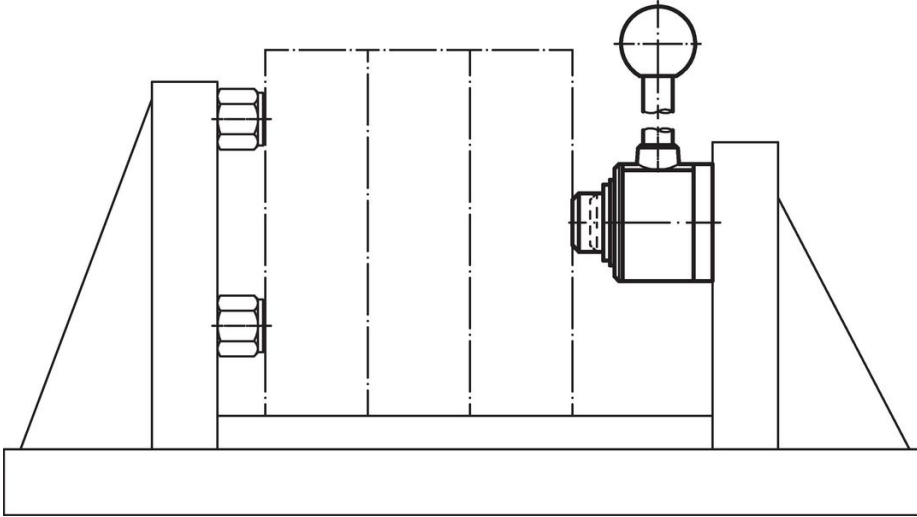

Compliance

RoHS-konform

Enthält Blei – Konform gemäß den Ausnahmen 6a / 6b / 6c.

Enthält SVHC-Stoffe >0,1% w/w

Enthält Blei – SVHC Liste [REACH] Stand 25.06.2025.

Enthält Proposition 65 Stoffe



Blei kann bei Exposition zu Krebs und Fortpflanzungsschäden führen.
<https://www.P65Warnings.ca.gov/>

Frei von Konfliktmineralien

Dieses Produkt enthält keine als "Konfliktmineralien" bezeichneten Stoffe wie Tantal, Zinn, Gold oder Wolfram aus der demokratischen Republik Kongo oder angrenzender Länder.