


Powerflow[™] HP

COMBI 600ml

A single component manual bead applicator for cartridges and sachets

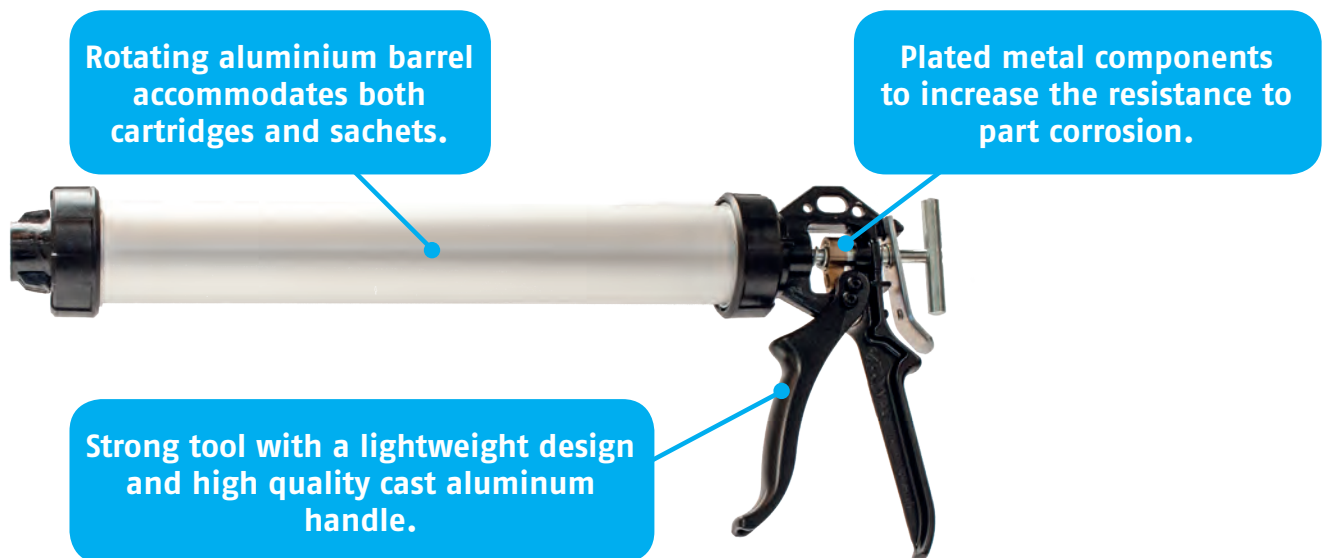

PRODUCT FEATURES:

- Sintered metal alloy catchplate for high efficiency and trouble-free performance.
- Surface hardened rod to resist scoring by the sintered metal catchplate.
- Metal wear compensation sleeve which protects the catchplate contact area, to increase tool life.
- Hardened rod release plate to maintain high material output for the life of the tool.
- Curved rod end(hook) for convenient tool storage (optional).
- Superb build quality – these tools are designed with the professional in mind (high service life).

The **Cox Powerflow HP** is part of a range of high-powered manual applicators. Designed for use with medium to high viscosity sealants and adhesives, the Powerflow Combi HP is ideal for professional users.

For more information call +44(0)1635 264500
Or visit www.pccox.co.uk

Powerflow™ HP

COMBI 600ml

A single component manual bead applicator for cartridges and sachets



APPLICATIONS:

- For medium to high viscosity
- Cartridge/sachet: 1-component
- Cartridge volumes: 310ml & 400ml
- Sachet volumes: 310ml, 400ml & 600ml

SPECIFICATIONS:


- Mechanical Advantage (ratio): 18:1
- Barrel Length: 382mm
- Max Force (Plunger): 3.5kN
- Tool Weight: 1.06 kg
- Handle Material: Epoxy coated aluminium
- Barrel Material: Anodised aluminium
- Certificates: ISO, REACH
- Packaging Options: single or 5/6/10 per box

WEB LINKS:

- Academy video
www.pccox.co.uk/en/cox-academy
- Spare parts diagram
www.pccox.co.uk/en/exploded-diagrams

OTHER MODELS AVAILABLE:

- Powerflow Cartridge
- Powerflow Combi
- Powerflow Bulk
- Powerflow 1ltr
- Powerflow Quart

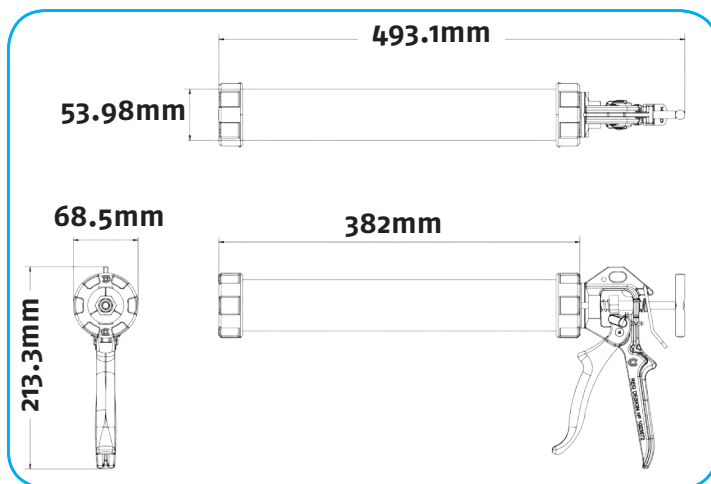

CARTRIDGES/SACHETS:

310ml:



400ml:



600ml:



PRODUCT RANGE BY POWER:



PC Cox Ltd., Turnpike Road, Newbury, Berkshire, RG14 2LR
 T Sales +44 (0) 1635 264500 F +44 (0) 1635 264555
 E sales@pccox.co.uk
www.pccox.co.uk

©PC Cox Ltd. 2014. Cox is a trademark of PC Cox Ltd. Every effort has been made to ensure that the information contained in this leaflet was correct at the time of going to press. However, the company retains the right to change any specification without notice, in line with the company's policy of continual product development.

1P3268


 The original

